

Sales Order	
Customer:	<input type="text" value="A"/> 110
Product:	<input type="text" value="1"/> 120
Quantity:	<input type="text" value="10"/> 130
Shipping:	<input type="text" value=""/> 140
<input type="button" value="Enter"/> 150	

Figure 1A

100A

Sales Order	
Customer:	<input type="text" value="A"/>
Product:	<input type="text" value="1"/>
Quantity:	<input type="text" value="10"/>
Shipping:	<input type="text" value="Express FOB"/> 140
<input type="button" value="Edit"/> 160	
<input type="button" value="Process"/> 170	

Figure 1B

100A

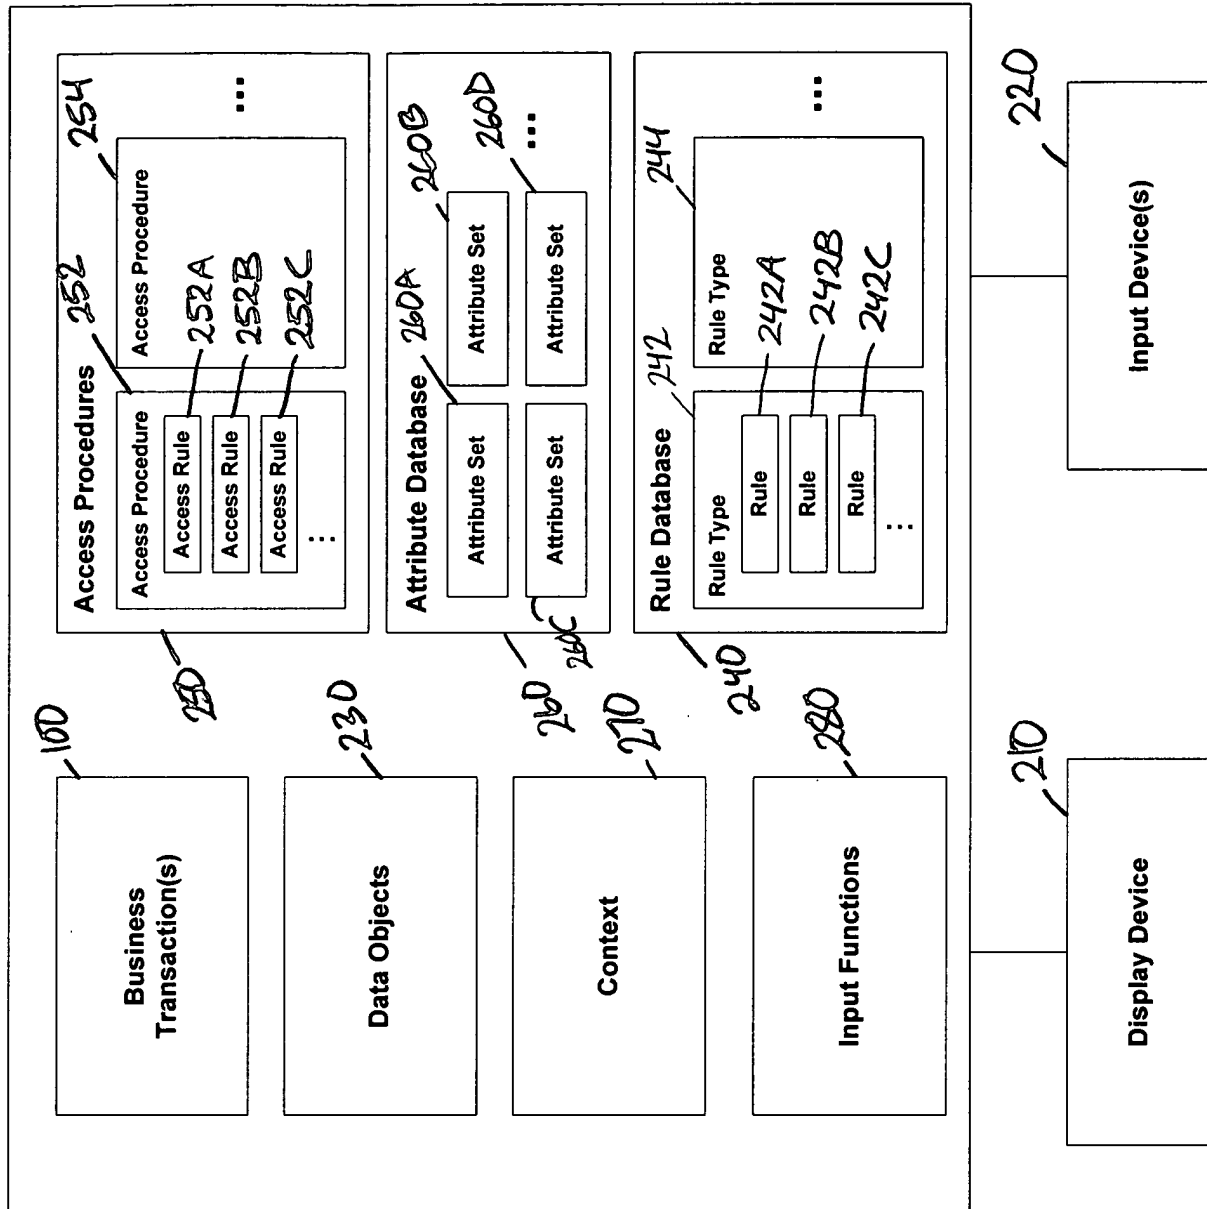


Figure 2

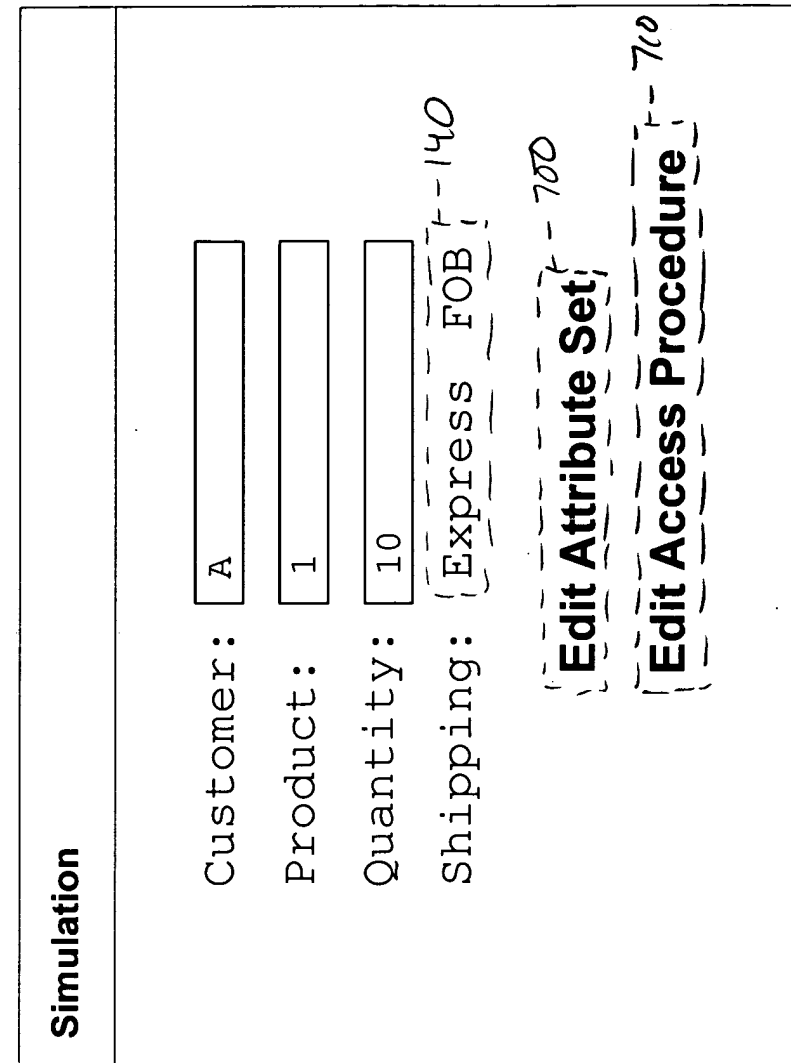


Figure 3

300

Figure 7

1000

Customer: A
Product: 1
Quantity: 10
Shipping: Express FOB

Edit Attribute Set

Edit Access Procedure

Rule Type	Rule Number	Term 1	Rule Values	Term 2
Shipping Rule	1	Express	43DA	420B
Shipping Rule	2	24 Hour		FOB
Shipping Rule	3	Standard		FOB

Enter

280A ✓

Figure 4

Create Attribute Database

Attribute Set	Query Attribute(s)	Identified Rule
1	(A, ,)	Shipping Rule # 1
2	(, 1,)	Shipping Rule # 2
3	(A, 1,)	Shipping Rule # 3
4	(A, 1, Monday)	Shipping Rule # 2

Enter

280B →

Figure 5

Create Access Procedure

Access Rule	Query Attribute(s)
1	(Customer, ,)
2	(Customer, Product,)
3	(Customer, Product, Day)

Enter

280C →

Figure 6